

# STAMFORD

## S6L1D-C4 Wdg.26 - Technical Data Sheet

### Standards

STAMFORD industrial alternators meet the requirements of the relevant parts of the IEC EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100 and AS1359. Other standards and certifications can be considered on request.

### Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



### Excitation and Voltage Regulators

Excitation System					
AVR Type	MX321	MX341			
Voltage Regulation	± 0.5%	± 1%			with 4% Engine Governing
AVR Power	PMG	PMG			

No Load Excitation Voltage (V)	17.01
No Load Excitation Current (A)	0.92
Full Load Excitation Voltage (V)	60
Full Load Excitation Current (A)	2.9
Exciter Time Constant (seconds)	0.17

# STAMFORD

## S6L1D-C4 Wdg.26

Electrical Data		
Insulation System	H	
Stator Winding	Double Layer Concentric	
Winding Pitch	2/3	
Winding Leads	6	
Winding Number	26	
Number of Poles	4	
IP Rating	IP23	
RFI Suppression	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. Refer to factory for others	
Waveform Distortion	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%	
Short Circuit Ratio	1/Xd	
Steady State X/R Ratio	18.48	
50 Hz		
Telephone Interference	THF < 2%	
Cooling Air Flow	1.46 m <sup>3</sup> /sec	
Voltage Star (V)	660	690
Voltage Delta (V)	380	400
-	-	-
kVA Base Rating (Class H) for Reactance Values (kVA)	800	800
Saturated Values in Per Unit at Base Ratings and Voltages		
Xd Dir. Axis Synchronous	2.12	1.94
X'd Dir. Axis Transient	0.17	0.16
X''d Dir. Axis Subtransient	0.14	0.13
Xq Quad. Axis Reactance	1.93	1.77
X''q Quad. Axis Subtransient	0.31	0.28
XL Stator Leakage Reactance	0.07	0.07
X2 Negative Sequence Reactance	0.06	0.06
X0 Zero Sequence Reactance	0.01	0.01
Unsaturated Values in Per Unit at Base Ratings and Voltages		
Xd Dir. Axis Synchronous	2.54	2.33
X'd Dir. Axis Transient	0.20	0.18
X''d Dir. Axis Subtransient	0.17	0.15
Xq Quad. Axis Reactance	1.99	1.82
X''q Quad. Axis Subtransient	0.37	0.34
XL Stator Leakage Reactance	0.08	0.08
Xlr Rotor Leakage Reactance	0.09	0.09
X2 Negative Sequence Reactance	0.07	0.07
X0 Zero Sequence Reactance	0.01	0.01

# STAMFORD®

## S6L1D-C4 Wdg.26



<b>Time Constants (Seconds)</b>		
T'd Transient Time Const.		0.092
T'd Sub-Transient Time Const.		0.016
T'do O.C. Field Time Const.		3.340
Ta Armature Time Const.		0.022
T'q Sub-Transient Time Const.		0.010
<b>Resistances in Ohms (<math>\Omega</math>) at 22°C</b>		
Stator Winding Resistance (Ra), per phase for series connected		0.0088
Rotor Winding Resistance (Rf)		1.63
Exciter Stator Winding Resistance		18.47
Exciter Rotor Winding Resistance per phase		0.095
PMG Phase Resistance (Rpmg) per phase		1.91
Positive Sequence Resistance (R1)		0.0110
Negative Sequence Resistance (R2)		0.0127
Zero Sequence Resistance (R0)		0.0110
<b>Saturation Factors</b>		<b>690V</b>
SG1.0		0.49
SG1.2		2.05
<b>Mechanical Data</b>		
Shaft and Keys	All alternator rotors are dynamically balanced to better than BS6861: Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.	
	1 Bearing	2 Bearing
SAE Adaptor	SAE0,1	SAE0,1
Moment of Inertia	16.455 kgm <sup>2</sup>	15.93 kgm <sup>2</sup>
Weight Wound Stator	803kg	803kg
Weight Wound Rotor	721kg	679kg
Weight Complete Alternator	1897kg	1970kg
Shipping weight in a Crate	1940kg	2013kg
Packing Crate Size	160x105x153(cm)	160x105x153(cm)
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	-	BALL 6224
Bearing Non-Drive End	BALL 6317	BALL 6317

# STAMFORD®

S6L1D-C4 Wdg.26

## THREE PHASE EFFICIENCY CURVES

50Hz

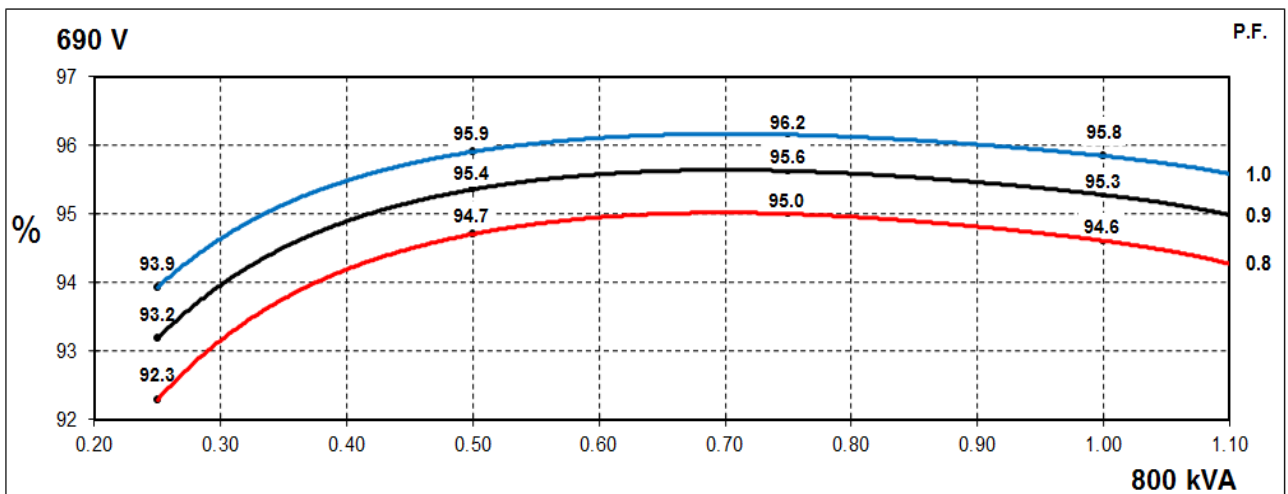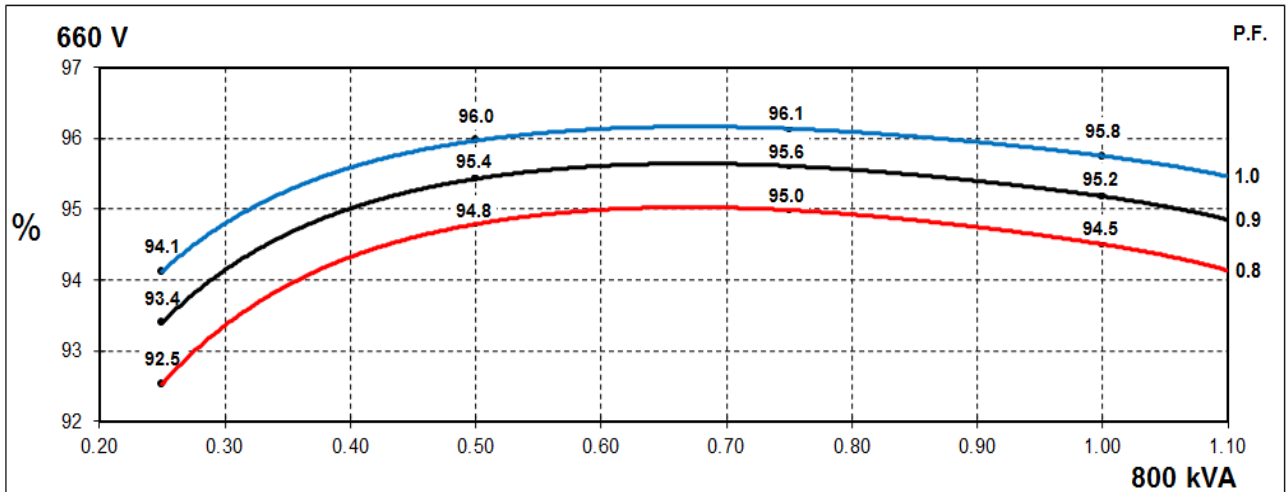


# STAMFORD®

S6L1D-C4 Wdg.26

## Locked Rotor Motor Starting Curves - Separately Excited

**50Hz**

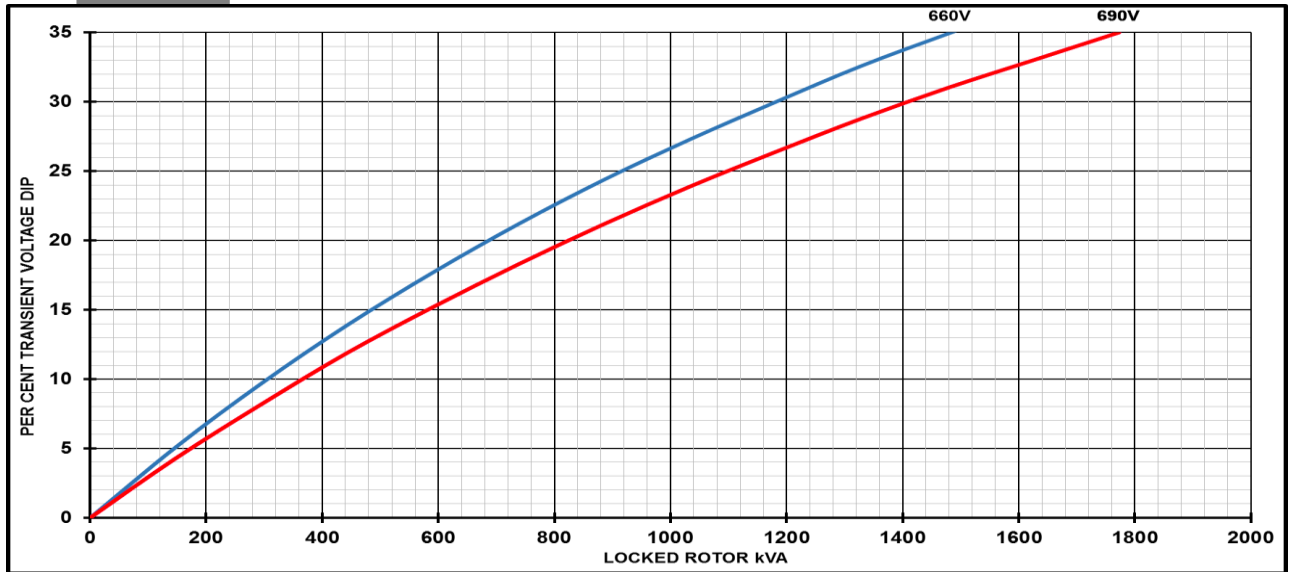


Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	
< 0.5	1	For voltage rise multiply voltage dip by 1.25
0.5	0.97	
0.6	0.93	
0.7	0.9	
0.8	0.85	
0.9	0.83	

# STAMFORD®

## S6L1D-C4 Wdg.26

### Three-phase Short Circuit Decrement Curve - Separately Exited

**50Hz**

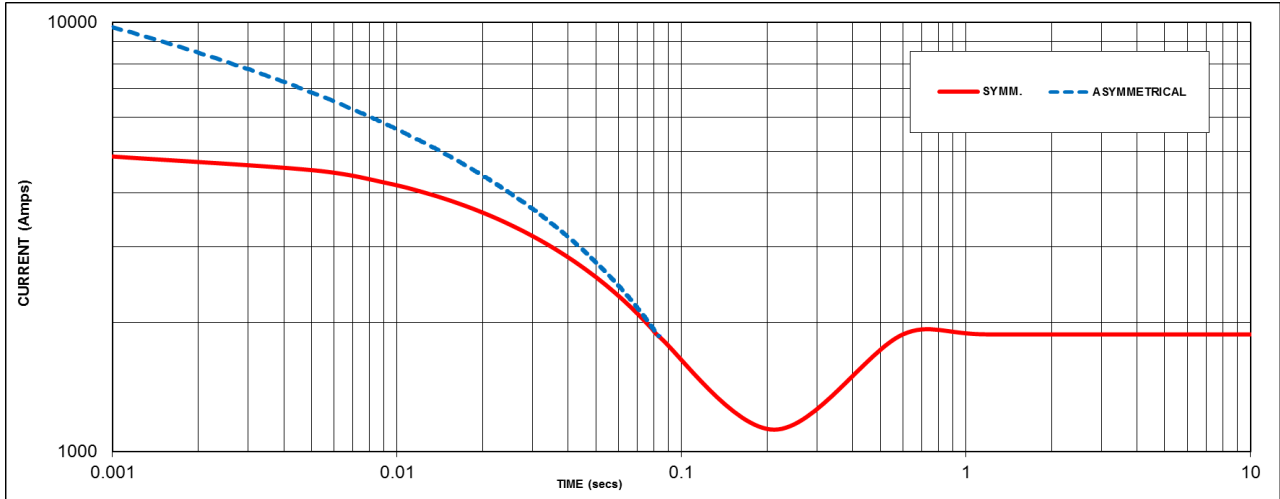

Sustained Short Circuit = 1875 Amps

**Note 1**

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
660V	X 1.00	-	-
690V	X 1.05	-	-
-	-	-	-
-	-	-	-

The sustained current value is constant irrespective of voltage level

**Note 2**

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

**Note 3**


Curves are drawn for Star connected machines under no-load excitation at rated speeds. For other connection the following multipliers should be applied to current values as shown :  
 Parallel Star = Curve current value X 2  
 Series Delta = Curve current value X 1.732

# STAMFORD®

S6L1D-C4 Wdg.26

## Typical Alternator Operating Charts

**690V/50Hz**

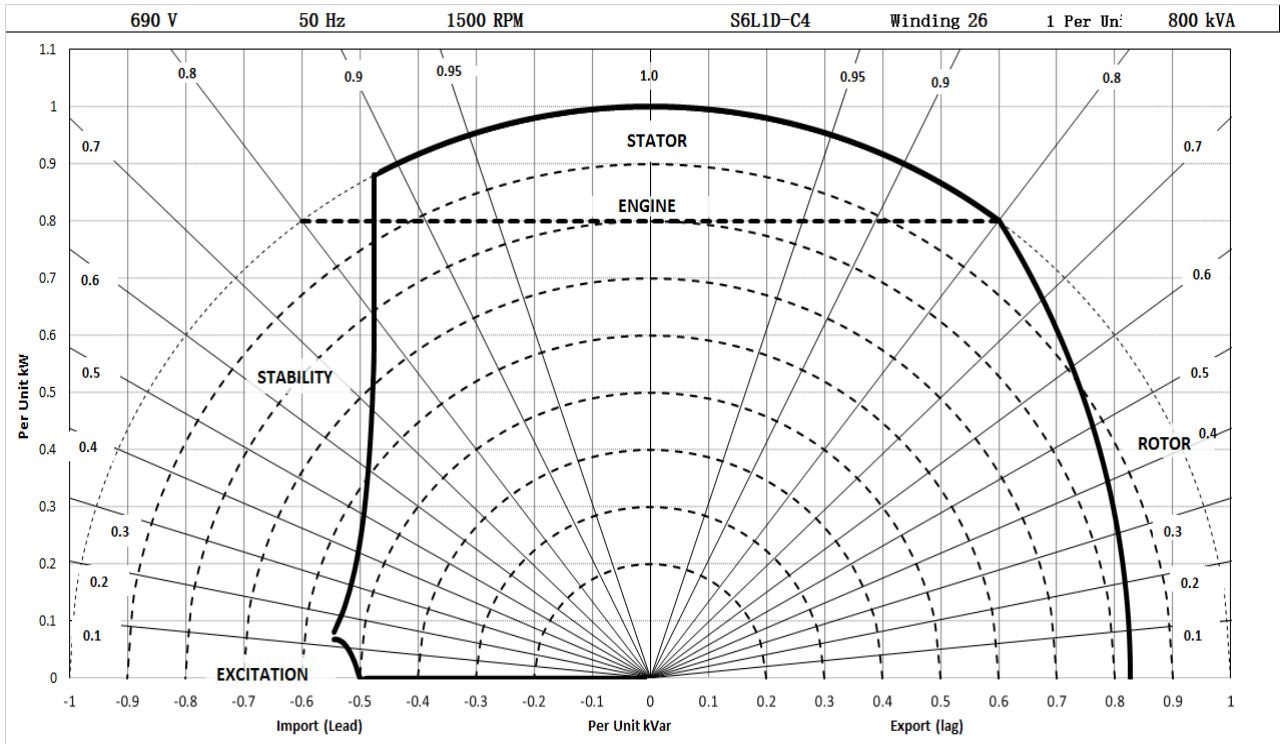

# STAMFORD®

## S6L1D-C4 Wdg.26

### RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C		Standby - 150/40°C		Cont. H - 125/40°C		Cont. F - 105/40°C	
<b>50 Hz</b>	Series Star (V)	660	690	660	690	660	690	660	690
	kVA	850	850	820	820	800	800	750	750
	kW	680	680	656	656	640	640	600	600
	Efficiency (%)	94.3	94.4	94.4	94.5	94.5	94.6	94.7	94.8
	kW Input	721	720	695	694	677	676	634	633

<b>60 Hz</b>	Series Star (V)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	kVA	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	kW	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Efficiency (%)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	kW Input	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

#### De-Rates

All values tabulated above are subject to the following reductions:

- 5% when air inlet filters are fitted
- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters must be referred to applications.

#### Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

**Note:** Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at [youtube.com/stamfordavk](https://youtube.com/stamfordavk)

**[news.stamford-avk.com](https://news.stamford-avk.com)**

**For Applications Support:  
[applications@cummins.com](mailto:applications@cummins.com)**

**For Customer Service:  
[emea.service@cummins.com](mailto:emea.service@cummins.com)**

**For General Enquiries:  
[Stamford-avk@cummins.com](mailto:Stamford-avk@cummins.com)**

Copyright 2016. Cummins Generator Technologies Ltd. All rights reserved.  
Cummins and the Cummins logo are registered trade marks of Cummins Inc.  
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.

